

**766**

## Soap Dispenser

The 766 is a pump action deck mounted soap dispenser with an angled spout, and is compatible with any ONVO liquid soap feeding system.



### Codes

766

### Technical Data

Finishes	C (Chrome) / CS (Satin)
Warranty	12 months from date of purchase
Weight	0.78Kg (1lb 11oz)
Recommended soap viscosity	100 to 3800 cPs - Liquid soap only. Not suitable for use with foam soap, alcohol gel or sanitizer
Standard discharge	0.88cc's adjustable
Stainless steel grade	304
Recommended soap system (not included)	ST series, FB1, MT1 (to be specified separately)
Standard discharge	1 cc per stroke - NOT ADJUSTABLE

### Spare Parts

There are no user serviceable parts.

### Installation Requirements


Counter top cutout required (dia)	22mm ( $\frac{55}{64}$ " )
Maximum countertop thickness	55mm ( $2\frac{11}{64}$ " )
Reservoir location	The reservoir must be mounted below the dispenser. The dispenser is not designed to draw soap from a reservoir mounted above.

## Related Products

Sensor tap	<a href="#">980</a>
Soap feed	<a href="#">Soap feed systems</a>

## Related Documents

Installation manual	email: <a href="mailto:sales@onvouk.com">sales@onvouk.com</a>
Operation and maintenance manual	email: <a href="mailto:sales@onvouk.com">sales@onvouk.com</a>
Warranty document	email: <a href="mailto:sales@onvouk.com">sales@onvouk.com</a>
Installation video	Coming soon

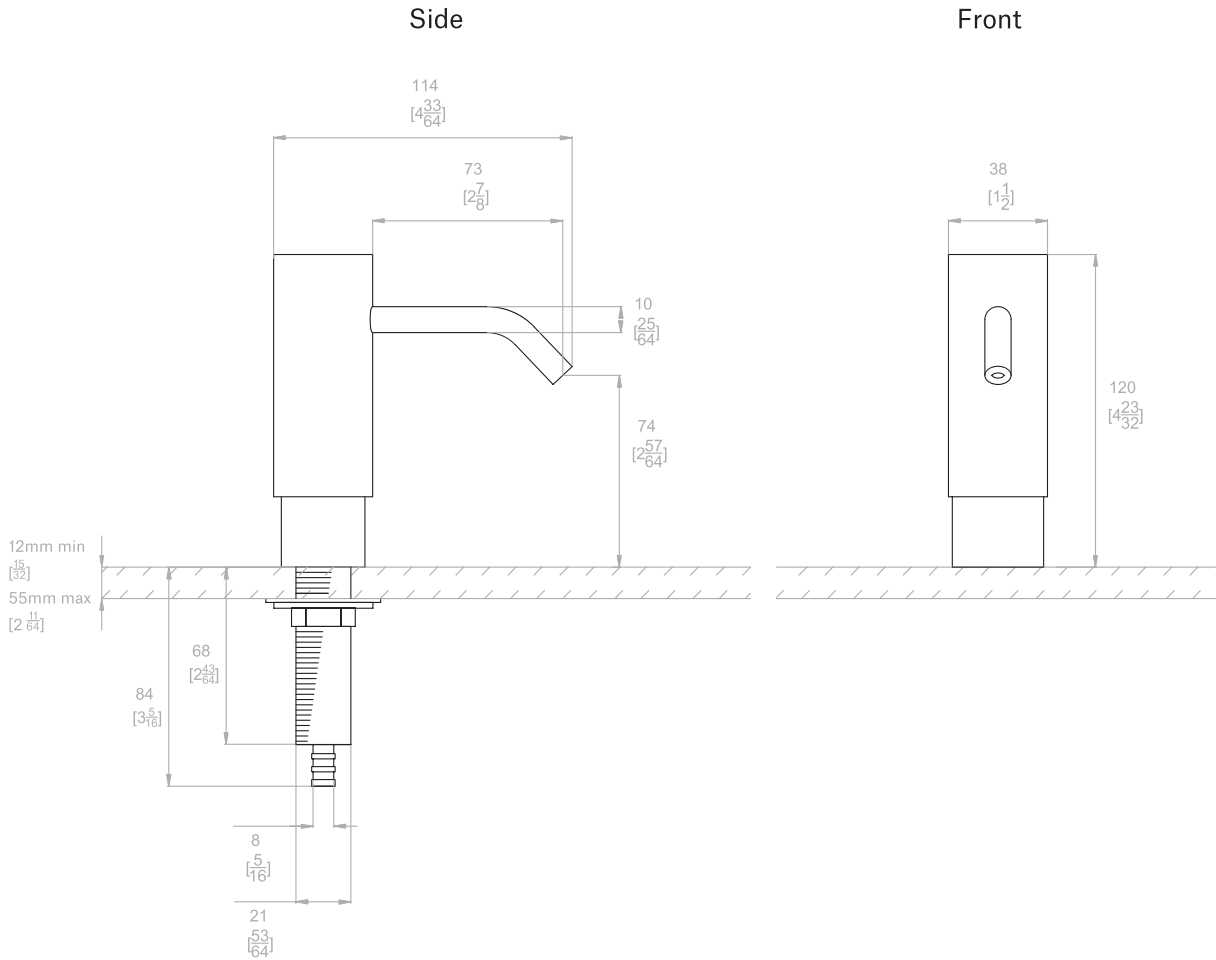

## Cutout

