

Latherwash 2W Curve

The Solid Surface Latherwash 2W is only 312mm deep. The Latherwash 2W Curve has a 20mm radiused front edge making it a very safe product for the toilet environment, particularly where there are younger children. Available in a wide range of Solid Surface colours and solid grade laminate front panel options.



Codes	Length	Users	Weight
602W	600mm (23 $\frac{5}{8}$ ")	1	25Kg (55lb 1oz)
1202W	1200mm (47 $\frac{1}{4}$ ")	2	40Kg (88lb 2oz)
1802W	1800mm (70 $\frac{7}{8}$ ")	3	56Kg (123lb 7oz)
2402W	2400mm (94 $\frac{1}{4}$ ")	4	71Kg (156lb 8oz)
3002W	3000mm (118 $\frac{1}{8}$ ")	5	87Kg (191lb 12oz)

Technical Data

Warranty	5 years from date of purchase
Solid surface	Corian
Front panel material	Solid grade laminate (wide range of colours available)

Installation Requirements


Brackets	Modular bracket system included
Tension in top fixing location (Unfactored)	2.96kN
Shear in bottom fixing location (Unfactored)	1.92kN
Fixing height	See drawing
Plumbing	Connection to 1 $\frac{1}{2}$ " waste outlet required. Installer to provide water supply for taps. See separate datasheet for ONVO sensor taps.

Related Products


Sensor tap	180
Push tap	260
Soap dispenser	480

Related Documents


Installation manual	email: sales@onvouk.com
Operation and maintenance manual	email: sales@onvouk.com
Warranty document	email: sales@onvouk.com

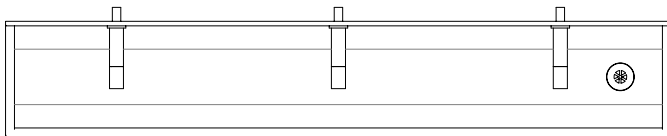

Latherwash 2W Curve 1800 - Plan View

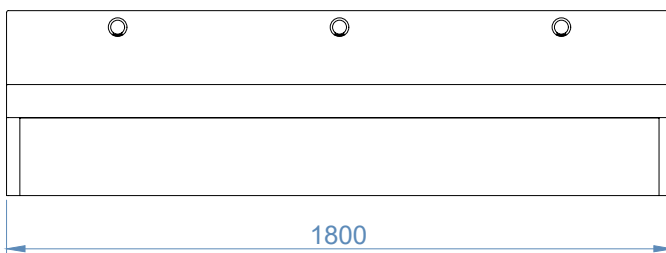

Latherwash 2W Curve 1800 - Front View

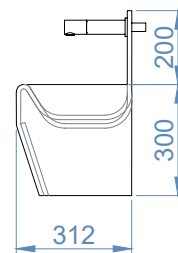

Latherwash 2W Curve 1800 - Side View