
866

Soap Dispenser

The 866 is a sensor operated deck mounted soap dispenser with an angled spout.



Codes

866

Technical Data

Finishes	C (Chrome) / CS (Satin)
Warranty	12 months from date of purchase
Weight	1.12Kg (2lb 8oz)
Recommended soap viscosity	100 to 3800 cPs - liquid soap only. Not suitable for use with foam soap, alcohol gel or sanitizer
Standard discharge	0.88cc adjustable
Soap system (included)	1 litre soap bottle and pump (0.26 GAL (US))
Power supply	Mains power (IP68 rated 12V transformer with push-fit cabling to dispenser)

Spare Parts

150025	Pump
150039	Transformer - 12V - to be hard wired
07100020	Bottle - 1L (0.26 GAL (US))
150011	Sensor

Optional Accessories

150038	Pump for multi-feed installation - 1 required per dispenser
07220090	Multi-feed soap reservoir with top fill for sensor soap dispensers
07220096	Sensor operated soap dispenser multi-feed soap reservoir (see separate datasheet for multifeed system)

Installation Requirements

Counter top cutout required (dia)	28mm (1 $\frac{7}{64}$ ")
Maximum countertop thickness	50mm (2")
Access requirements	Pumps and transformers must be accessible at all times for servicing.
Reflective surfaces	Not to be installed opposite a mirror, or other reflective surfaces.
Washroom layout	To prevent sensor malfunction, avoid installing directly opposite other sensor taps/soap dispensers.
Power supply	Must be installed on its own power circuit to avoid interference from other power demands.
Cabling	3 amp fused spur to IP67 rated transformer; low voltage push fit connector to tap .

Compliance


cUL

Related Products

Sensor Tap [140](#)

Related Documents

Installation manual	email: sales@onvouk.com
Operation and maintenance manual	email: sales@onvouk.com
Warranty document	email: sales@onvouk.com
Installation video	Coming soon

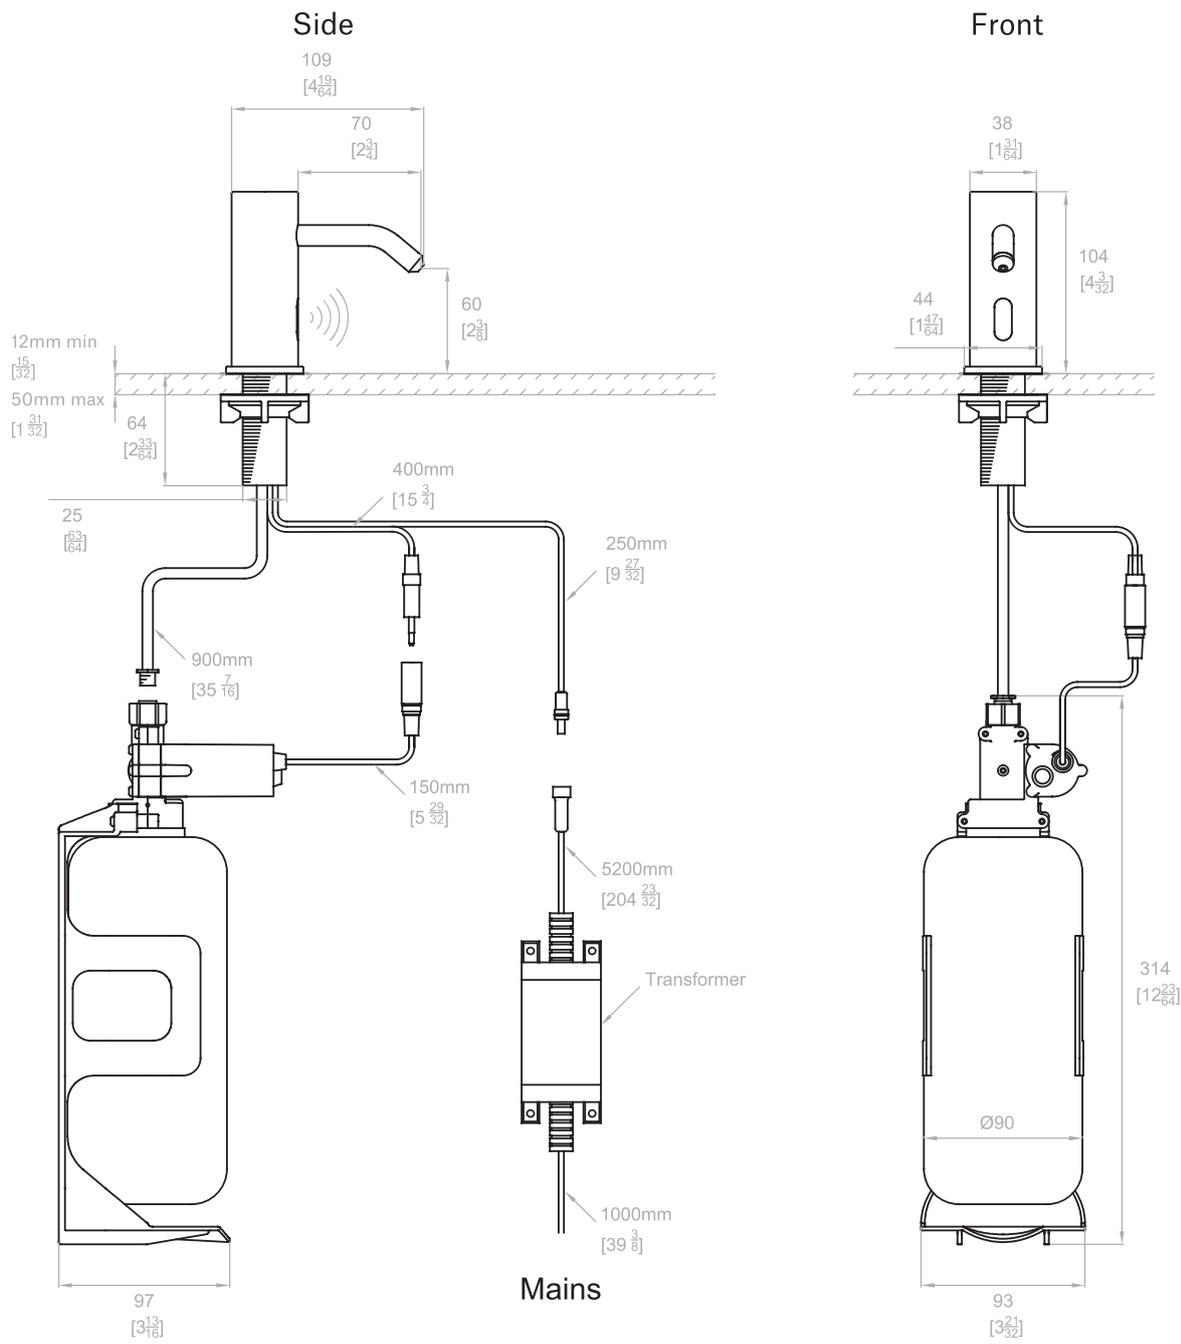

Cutout

